



TOURUS+ A12

12" active versatile loudspeaker - with Bluetooth

Product Description


TOURUS+ A12 is a 12" active loudspeaker from our TOURUS+ Active Series — engineered to deliver powerful, full-range sound for live performance, portable PA and installation use.

Powered by a Class D bi-amplified system, it delivers 450 W continuous and 900 W peak output with a maximum SPL of 128 dB at 1 m. Its custom Wharfedale Pro 12" LF driver with a 3.0" voice coil delivers deep, controlled bass, while integrated DSP with four FIR presets (NORMAL, LIVE, DJ, SPEECH) optimises performance in any environment. Bluetooth and TWS connectivity enable quick wireless playback and stereo linking.

Built into a durable polypropylene cabinet with dual-angle pole sockets (0° and 3°), multiple rigging points and a 45° monitor angle, TOURUS+ A12 is designed for stage, floor or wall-mounted installation. Rugged, versatile and efficient — a true all-purpose loudspeaker solution. Pair it with a T-SUB-AX active sub for perfectly matched low-frequency extension.

Key Features

- | | |
|---------------------|-----------------------|
| ✓ Full-Range, 2-way | ✓ 128 dB Max SPL @ 1m |
| ✓ 12" LF Driver | ✓ 450 W Continuous |
| ✓ 900 W Peak | ✓ Polypropylene |

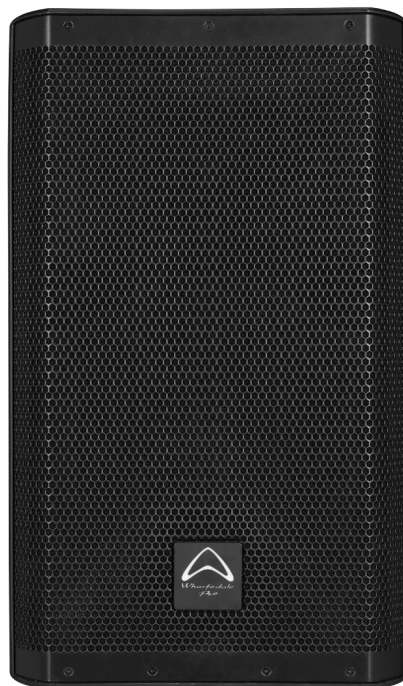

Specifications

Specification	Value
Active / Passive	Active
System Type	Full-Range
Configuration	2-way
System Continuous Power	450 W
System Peak Power	900 W
Max SPL @ 1m	128 dB
Frequency Response (+/-3dB)	58 Hz - 20 kHz
Frequency Range (-10dB)	50 Hz - 20 kHz
Crossover Frequency	2.0 kHz
Bluetooth	Yes
Input Connector	2 x 1/4" Jack / XLR Combo
Link Connector	pin XLR
LF Driver Size	12"
LF Voice Coil Size	3"
LF Rated Impedance	4 Ω
LF Power (RE:AES2-2012)	200 W
HF Driver Type	Compression Driver
HF Voice Coil Size	1.73"
HF Diaphragm Material	1.37"
HF Power (RE:AES2-2012)	50 W
HF Rated Impedance	8 Ω
Nominal Coverage (H x V)	90° x 60°
Amplifier design	Class D
DSP Controls	Normal / Live / DJ / Speech

Specifications (continued)

Specification	Value
Preset list	Normal / Live / DJ / Speech
Active loudspeaker Input Impedance	10 KΩ Balanced
Input sensitivity	+4 dBu
Max Input Level	+18 dBu
Line output	Pin XLR
240 V AC W (1/8 rated output power)	137
120 V AC W (1/8 rated output power)	137
Idle W	26
Enclosure Material	Polypropylene
Grille Material and Finish	Steel Black
Finish	Black Polypropylene
Handles	2
Deployment	Ground, Flying, Pole, Wall Mount
Pole Mount	Dual Angle (0° / -3°) 35 mm
Brackets Included	No
Rigging	Yes
M8	5
Main Power	100-120 V~/220-240 V~,50/60 Hz
Power Supply	SMPS
Unpacked Height	609 mm
Unpacked Width	360 mm
Unpacked Rear	201 mm
Unpacked Depth	346 mm
Packed - Height	690 mm
Packed - Width Front	440 mm

Specification	Value
Packed - Width Rear	440 mm
Packed - Depth	430 mm
Net Weight	16.49 kg
Gross Weight	18.74 kg