



WLA-218BF


Dual 18" IPX6 waterproof subwoofer

Product Description

Dual 18" passive subwoofer
IPX6 Waterproof Certification
Wax wrapped components
Anti-corrosion stainless steel hardware
Waterproof input connector
System Continuous Power 2000w
System Programme Power 4000w
System Peak Power 8000w
Impedance 4Ω
18mm Plywood construction

Key Features

- | | |
|--------------------------|-----------------------|
| ✓ Subwoofer, Bass-reflex | ✓ 148 dB Max SPL @ 1m |
| ✓ 2 x 18" LF Driver | ✓ 4 Ω Impedance |
| ✓ 2000 W Continuous | ✓ 4000 W Programme |

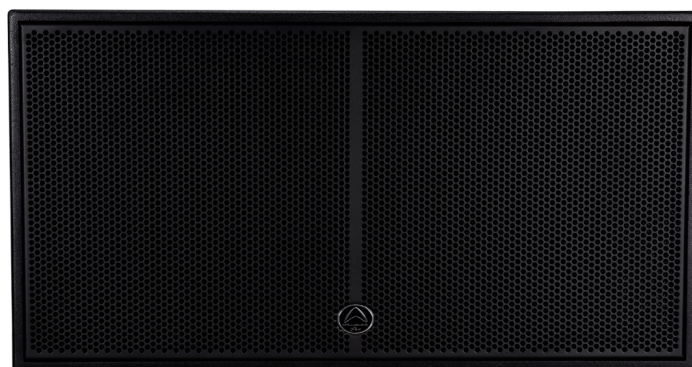

Specifications

Specification	Value
Active / Passive	Passive
System Type	Subwoofer
Configuration	Bass-reflex
System Continuous Power	2000 W
System Programme Power	4000 W
System Peak Power	8000 W
Max SPL @ 1m	148 dB
Sensitivity 2.83 V / 1 m	109 dB
Frequency Response (+/-3dB)	30 Hz - 800 Hz
Frequency Range (-10dB)	25 Hz - 1.0 KHz
Crossover Frequency	Preset Dependent
Bluetooth	No
Input Connector	1 x Neutrik NLT4 MP BAG
LF Driver Size	2 x 18"
LF Magnet Material	Ferrite
LF Frame Material	Aluminium
LF Voice Coil Size	4"
LF Rated Impedance	2 x 8 Ω
LF Power (RE:AES2-2012)	2 x 1000 W
Cabinet Type	Trapezoid
Enclosure Material	Birch Plywood
Grille Material and Finish	Black Aluminium
Finish	Waterproof Black Paint
Handles	4

Specifications (continued)

Specification	Value
Deployment	Ground
Pole Mount	None
Brackets Included	Yes
Rigging	No
Included Accessory	User Manual
Unpacked Width	1065 mm
Unpacked Rear	1065 mm
Unpacked Depth	756 mm
Packed - Height	640 mm
Packed - Width Front	830 mm
Packed - Width Rear	830 mm
Packed - Depth	1140 mm
Net Weight	72.86 kg
Gross Weight	87.1 kg