



XLA-308 Common Fly Frame

Supports both the XLA-308 elements and XLA-118SUB

Product Description

The XLA-308 Common Fly Frame supports either an array of XLA-308 elements or combinations with the flying XLA-118SUB.


4 x shackles included.

Note: XLA-308 CFF supports MAX 6 x XLA-308 under 3 x XLA-118SUB

Key Features

✓ 560 kg Workload Limit

✓ Steel

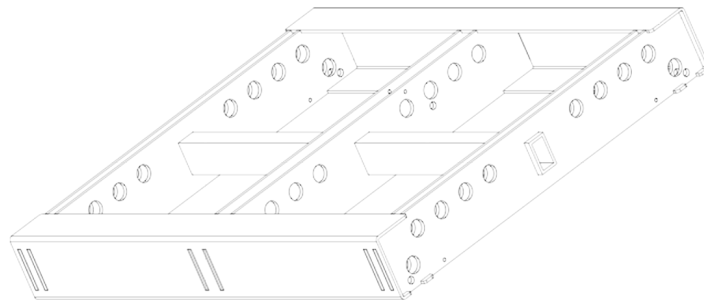

Specifications

Specification	Value
Workload Limit 12:1 Safety Factor	560 kg
Suitable For	Flying and Ground Stacking
TUV Certification	Current CN24YOG6 001
Holding Capacity	Combined array of XLA-118SUB allow a maximum of 6 XLA-308.
Frame Material	Steel
Frame Finish	Black Paint
Mounting Type	Base Mounting
Included Accessory	Shackles included
Unpacked Height	100 mm
Unpacked Width	786 mm
Unpacked Rear	786 mm
Unpacked Depth	640 mm
Packed - Height	170 mm
Packed - Width Front	860 mm
Packed - Width Rear	860 mm
Packed - Depth	730 mm
Net Weight	28.22 kg
Gross Weight	30.2 kg